

On-The-Go Compliance Plan for the USB 2.0 Specification

Revision 1.0

Revision History

Revision	Issue Date	Comment
0.7	6/28/02	
0.71	7/15/02	
0.80a RC1	8/2/02	Release Candidate 1
0.81rc4eo	10/10/2002	Updates from compliance review – partial Add protocol checklist items. Add tests for sections 7, 8.
0.81rc5	11/05/02	Rewrite of protocol section based on set of proposed errata to bound DRD behavior for a specified test device.
.89 RC 1	12/19/02	Updates based on feedback from 11/07/02 OTG FTF review and subsequent review comments. Started adding pointers from checklist assertions to the tests that cover them.
.90	1/28/03	Minor review updates. Dual role device terminology changed to OTG Device. Sections added to test descriptions for assertions covered. Protocol assertions updated to reflect proposed errata to the OTG supplement version 1.0.
1.0 RC	3/21/03	Updates to compliance plan to use variable load on OET. Minor corrections of typographical errors. Checklist material moved to separate checklist documents.
1.0 RC2	4/16/03	Updates from RC feedback and first Compliance Workshop trial.
1.0 RC3	5/21/03	Updates from detailed review of electrical tests and procedures. Updates from OTG supplement errata introduced in the last month.
1.0 RC4	6/5/03	Updates to resolve disagreement over amount of time VBUS needs to remain valid without a connect. Updates to messaging tests.
1.0 RC5	6/19/03	Updates to reflect recent supplement change to make TA_WAIT_BCON consistent at 1 second. Changes to message tests to reflect consistent use of a device not responding type error message in Messaging error cases.
1.0	6/25/03	Updates on messaging test min and max times based on technical discussion and vote for 1.0 compliance plan at the 6/24/03 OTG FTF.
1.0 (final0	8/12/03	Remove “Review and discussion” disclaimer, correct typographical errors, and correct test description 5.9 under section 6.4.2.2 to require an error message at any time prior to 30 seconds.

Please send comments via electronic mail to: techsupp@usb.org

© Copyright 2002-2003, USB Implementers Forum, Inc.
All rights reserved.

DISCLAIMER OF WARRANTIES

THIS SPECIFICATION IS PROVIDED “AS IS” AND WITH NO WARRANTIES OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, NO WARRANTY OF NONINFRINGEMENT, NO WARRANTY OF MERCHANTABILITY, NO WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, NO WARRANTY OF TITLE, AND NO WARRANTY ARISING OUT OF ANY PROPOSAL, SPECIFICATION, OR SAMPLE, ALL OF WHICH WARRANTIES ARE EXPRESSLY DISCLAIMED. WITHOUT LIMITING THE GENERALITY OF THE FOREGOING, USB-IF AND THE AUTHORS OF THE SPECIFICATION DO NOT WARRANT OR REPRESENT THAT USE OF THE SPECIFICATION WILL NOT INFRINGE THE INTELLECTUAL PROPERTY RIGHTS OF OTHERS. USERS OF THE SPECIFICATION ASSUME ALL RISK OF SUCH INFRINGEMENT, AND AGREE THAT THEY WILL MAKE NO CLAIM AGAINST USB-IF OR THE AUTHORS IN THE EVENT OF CLAIMS OF INFRINGEMENT. USB-IF IS NOT LIABLE FOR ANY CONSEQUENTIAL, SPECIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE SPECIFICATION.

LICENSE FOR INTERNAL USE ONLY

USB-IF HEREBY GRANTS A LICENSE TO REPRODUCE AND TO DISTRIBUTE THIS SPECIFICATION FOR INTERNAL USE ONLY. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, IS GRANTED HERewith, AND NO LICENSE OF INTELLECTUAL PROPERTY RIGHTS IS GRANTED HERewith.

All product names are trademarks, registered trademarks, or servicemarks of their respective owners.

Contributors

Chris Kolb	ARC
Ray Asbury	Cypress Semiconductor
David Cobbs	Cypress Semiconductor
Steven Connelly	Cypress Semiconductor
Kosta Koeman	Cypress Semiconductor
David Luke	Cypress Semiconductor
Simon Nguyen	Cypress Semiconductor
Tuan Nguyen	Cypress Semiconductor
Dan Froelich	Intel
Paul E. Berg	MCCI
Rob Douglas	Mentor Graphics
Russell Hicks	Mentor Graphics
Phil Holliman	Mentor Graphics
Ian Parr	Mentor Graphics
Mark Hanson	Microsoft Corporation
Mark Carlson	Motorola
Eric Overtoom	Motorola
Mark Jenkins	Nokia
Chris Schell	Philips
Rik Stopel	Philips
Kenneth Tan	Philips
Wang Zhong Wei	Philips
Johan Craeybeckx	PMTC
Frank Marchal	PMTC
Robby Putzeys	PMTC
Terry Remple	Qualcomm
Joe Meza	SoftConnex
Dan Harmon	Texas Instruments
Jeff Kacines	Texas Instruments
Jing Wang	Transdimension, Inc.
David Wooten	Transdimension, Inc.
Zong Liang Wu	Transdimension, Inc.
Ricki Xia	Transdimension, Inc.
Mark Paxson	USB-IF
Bill Bordy	

Table of Contents

1	Introduction.....	6
1.1	General.....	6
1.2	Objective of the OTG Compliance Program.....	6
1.3	Scope of the Document.....	6
1.4	Intended Audience	6
1.5	Reference Document(s)	6
2	Acronyms and Terms.....	7
3	Executive Summary.....	8
4	Submission Materials.....	9
4.1	Non-OTG Checklists	9
4.2	Device Specific Procedures	9
4.3	Device Specific Information.....	9
5	Electrical.....	10
5.1	Introduction.....	10
5.2	Electrical Test Tables	10
5.3	OTG Electrical Test Device (OET)	11
5.3.1	Mode Switch Settings.....	11
5.3.2	OTG Electrical Test Device Schematic.....	12
5.4	OTG Electrical Test Setup.....	13
5.4.1	Description of OTG Electrical Test Setup components:	14
5.5	Electrical Tests	14
5.5.1	VBUS Voltage Tests	14
5.5.2	VBUS Current Tests.....	18
5.5.3	Data-Line Voltage Tests	18
5.5.4	ID Resistance (Detection) Tests	18
5.5.5	Termination Tests	18
5.5.6	Input Levels Tests	19
5.5.7	Decoupling Capacitance Test.....	21
5.5.8	Data-Line Pulsing Test.....	22
6	Protocol	23
6.1	Introduction.....	23
6.2	Equipment	23
6.2.1	Test Equipment.....	23
6.2.2	OTG Protocol Tester (OPT)	23
6.2.3	Test Setup 1	23
6.2.4	Test Setup 2	23
6.3	Unit Under Test Requirements.....	24
6.4	Tests.....	25
6.4.1	A-UUT	25
6.4.2	B-UUT	38
6.4.3	Peripheral Only	46
7	Messaging	47
7.1	Overview.....	47
7.2	Minimum Required Messages.....	47
7.3	Additional Messages	48
7.4	Compliance tests	48
8	Interoperability.....	49

8.1	Introduction	49
8.2	Targeted Peripheral List	49
8.3	OTG Peripheral Types	49
8.4	Compliance Tests	49
9	USB-IF Required Tests.....	50
9.1	USB-IF Peripheral Testing	50
9.1.1	Interoperability	50
9.1.2	Full Speed/Low Speed Electricals	50
9.1.3	High Speed Electricals	50
9.1.4	OTG Required Peripheral Test Modifications	51
9.2	USB-IF Host Testing	52
9.2.1	Interoperability	52
9.2.2	Full Speed/Low Speed Electricals	52
9.2.3	High Speed Electricals	52
9.2.4	Procedures for specific test equipment	52
9.2.5	OTG Required Host Interoperability Testing Modifications	52
9.2.6	OTG Required Host Electrical Test Modifications	53

Table Listings

Table 5-1	OTG Device Electrical Tests	10
Table 5-2	OTG Peripheral (SRP Capable) Electrical Tests	11
Table 5-3	OTG Electrical Test Device Mode Switch Settings	11
Table 5-4	OTG Electrical Test Setup Equipment	14

Figure Listings

Figure 5-1	OTG Electrical Test Device Schematic	12
Figure 5-2	OTG Electrical Test Setup	13
Figure 6-1	Protocol Test Setup 1	23
Figure 6-2	Protocol Test Setup 1	24
Figure 6-3	State Diagram A-UUT	25
Figure 6-4	State diagram B-UUT	38
Figure 9-1	HS Electrical Test Tool	55

1 Introduction

1.1 General

USB has become a popular interface for exchanging data between a host PC and its peripherals. Due to its low cost, high speed, and widespread use, an increasing number of portable devices have a USB peripheral port. Although communication directly between portable devices would sometimes be useful, the USB specification only enables communication between a host port and a peripheral port. It does not enable communication directly between peripheral ports.

For this reason, the On-The-Go (OTG) supplement to the USB 2.0 specification was developed. The OTG Supplement enables USB connectivity between portable devices by specifying:

- smaller connectors
- new cables and adapters
- limited host capability for portable devices
- low power features

To ensure compliance with the added requirements of OTG, an OTG compliance program is required.

1.2 Objective of the OTG Compliance Program

The purpose of the OTG compliance program is to mirror the effectiveness of the USB-IF compliance program. The benefits of a compliance program have been proven by the USB initiative: the proliferation of knowledge, more stringent testing, and a higher standard of quality.

1.3 Scope of the Document

This document tests and/or checks for compliance with OTG requirements specified in the OTG Supplement.

1.4 Intended Audience

This specification is intended for developers of devices that support OTG.

1.5 Reference Document(s)

- On-The-Go Supplement to the USB 2.0 Specification (www.usb.org/developers/onthego)
- USB 2.0 Specification (www.usb.org/developers/docs.html)
- ECN_27%_ Resistor (www.usb.org/developers/docs.html)

2 Acronyms and Terms

This chapter lists and defines terms and abbreviations used throughout this specification. The On-The-Go terms and abbreviations are provided in the On-The-Go Supplement to the USB 2.0 Specification.

DUT	Device Under Test
OET	OTG Electrical Tester
OPT	OTG Protocol Tester
UUT	Unit Under Test
HNP	Host negotiation protocol as defined on the On-The-Go Supplement.
SRP	Session request protocol as defined in the On-The-Go Supplement.
On-The-Go Device	Device with a mini-AB connector supporting HNP and SRP protocols. Also called Dual Role Devices (DRDs).

3 Executive Summary

The On-The-Go compliance plan does not overlap the USB 2.0 peripheral compliance plan. Any parameter/feature specified in the USB 2.0 Specification will not be tested here. The On-The-Go compliance plan will test only “New” parameters/features that are specified in the On-The-Go Supplement to the USB 2.0 Specification.

The Significant features are:

- A limited Host capability
- Session Request Protocols
- Host Negotiation Protocols
- The ability to source at least 8 mA on VBUS
- A means of communicating with the user
- No Silent failures – i.e. there must be a method of alerting the user that an unsupported device has been attached, or that the attached device violates one of the conditions required to interface to the OTG Device, eg it requires more current than the OTG Device can provide.
- Interoperability with devices on the Targeted Peripheral List defined for the device under test.
- The details of these and other compliance tests are covered in subsequent sections of this document.

4 Submission Materials

The manufacturer of an OTG Device or SRP capable peripheral must provide completed checklists, device specific procedures and information before submitting the device for OTG testing.

4.1 Non-OTG Checklists

The USB-IF peripheral checklists (product and/or silicon) are required for an OTG Device which must also pass all standard USB-IF peripheral testing. The OTG checklist is also required. The OTG checklist is available separately from the USB-IF.

4.2 Device Specific Procedures

The manufacturer must provide the following written procedures to be used during testing:

1. Procedure to make the A-Device under test turn on VBUS (If the DUT is an OTG device)
2. Procedure to make the B-Device under test initiate an SRP
3. Procedure to make the A-device enter a state where it is responsive to SRP. (This is only required for devices that start a session based on insertion of a mini-A plug which support SRP.)

4.3 Device Specific Information

The manufacturer must provide a written document with the maximum-rated output current information for the A-Device under test.

The OET electrical test fixtures contain a variable resistance load that can be used to characterize the current output of an OTG device. This option is provided to allow consistent output current characterization between OTG devices. It may have compliance uses in the future.

5 Electrical

5.1 Introduction

The electrical tests in this section test only a partial list of all the possible electrical parameters. The tests should not be considered as a full validation test plan. It is the responsibility of the manufacturer of a device to verify compliance of all the electrical parameters specified in the OTG Supplement.

5.2 Electrical Test Tables

An OTG device must pass all relevant USB 2.0 compliance tests as well as the tests indicated in the electrical test tables. The tables are divided into tests for the device types: OTG devices and SRP capable peripherals.

The tests for OTG Devices are listed in Table 5-1.

Table 5-1 OTG Device Electrical Tests

OTG Test Section Number	Test Name	OTG Supplement Section Number	Parameter Name
5.5.1.1	A-UUT Output Voltage (VA_VBUS_OUT)	5.1.1	VA_VBUS_OUT
5.5.1.2	A-UUT VBUS Rise Time (TA_VBUS_RISE)	5.1.3	TA_VBUS_RISE
5.5.1.4	B-UUT (SRP capable) to OTG Device Output Voltage (VB_DRD_OUT)	5.3.4	VB_DRD_OUT
5.5.1.5	B-UUT (SRP capable) to Host Output voltage (VB_HST_OUT)	5.3.4	VB_HST_OUT
5.5.2.1	A-UUT Output Current (IA_VBUS_OUT)	5.1.1	IA_VBUS_OUT
5.5.2.2	B-UUT (OTG Device) Unconfigured Average Current (IB_DRD_UNCFG)	5.2.1	IB_DRD_UNCFG
5.5.6.1	A-UUT VBUS Valid (VA_VBUS_VLD)	5.1.1	VA_VBUS_VLD
5.5.6.2	A-UUT Session Valid (VA_SESS_VLD)	5.3.6	VA_SESS_VLD
5.5.6.3	B-UUT VBUS Valid (VB_SESS_VLD)	5.3.7	VB_SESS_VLD
5.5.7.1	OTG Device VBUS Bypass Capacitance (CDRD_VBUS)	5.1.4	CDRD_VBUS
5.5.8.1	Data-Line Pulsing Test (TB_DATA_PLS)	5.3.3	TB_DATA_PLS

The tests for SRP Capable Peripherals are listed in Table 5-2.

Table 5-2 OTG Peripheral (SRP Capable) Electrical Tests

OTG Test Section Number	Test Name	OTG Supplement Section Number	Parameter Name
5.5.1.4	B-UUT (SRP capable) to OTG Device Output Voltage (VB_DRD_OUT)	5.3.4	VB_DRD_OUT
5.5.1.5	B-UUT (SRP capable) to Host Output voltage (VB_HST_OUT)	5.3.4	VB_HST_OUT
5.5.6.3	B-UUT VBUS Valid (VB_SESS_VLD)	5.3.7	VB_SESS_VLD
5.5.8.1	Data-Line Pulsing Test (TB_DATA_PLS)	5.3.3	TB_DATA_PLS


5.3 OTG Electrical Test Device (OET)

5.3.1 Mode Switch Settings

Table 5-3 OTG Electrical Test Device Mode Switch Settings

Mode	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	SW9	SW10
Passive OTG Device Duplicator	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	B-Device	OFF
Passive "PC" Duplicator	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	B-Device	OFF
8 mA Load	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	A-Device	OFF
100 mA Load	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	A-Device	OFF
A-Device VBUS Level	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	A-Device	OFF
B-Device VBUS Level	OFF	OFF	OFF	OFF	ON	OFF	ON	ON	B-Device	OFF
VBUS Current Bypass	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	B-Device	OFF
Variable Load	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	A-Device	On

5.3.2 OTG Electrical Test Device Schematic

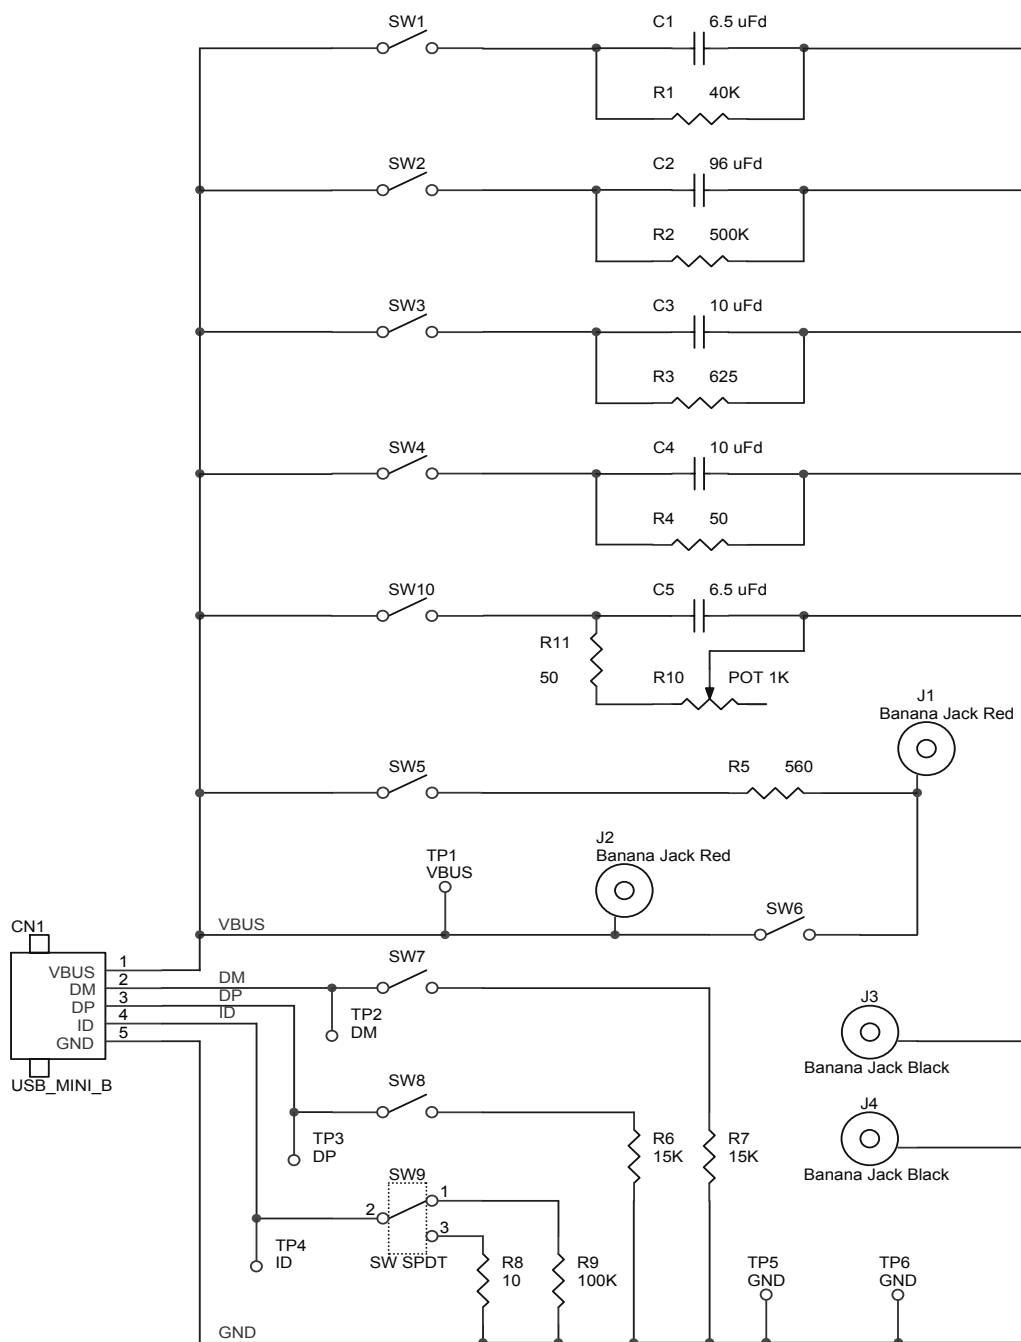

SW1 - PASSIVE DUAL-ROLE DEVICE
DUPLICATOR

SW2 - PASSIVE "PC" DUPLICATOR

SW3 - 8 mA LOAD

SW4 - 100 mA LOAD

SW5 - VBUS LEVEL

SW6 - VBUS CURRENT BYPASS

SW7 - DM PULL DOWN

SW8 - DP PULL DOWN

SW9 - ID RESISTANCE

SW10 - VARIABLE VBUS LOAD

NOTE: RESISTOR TOLERANCES ARE +/- 1%
CAPACITOR TOLERANCES ARE +/- 10%

Figure 5-1 OTG Electrical Test Device Schematic

Note: The switches can be replaced with relays and additional circuitry to allow external control through an interface (e.g. USB, GPIB, etc.). An OET that can be controlled remotely could be used to automate testing.

5.4 OTG Electrical Test Setup

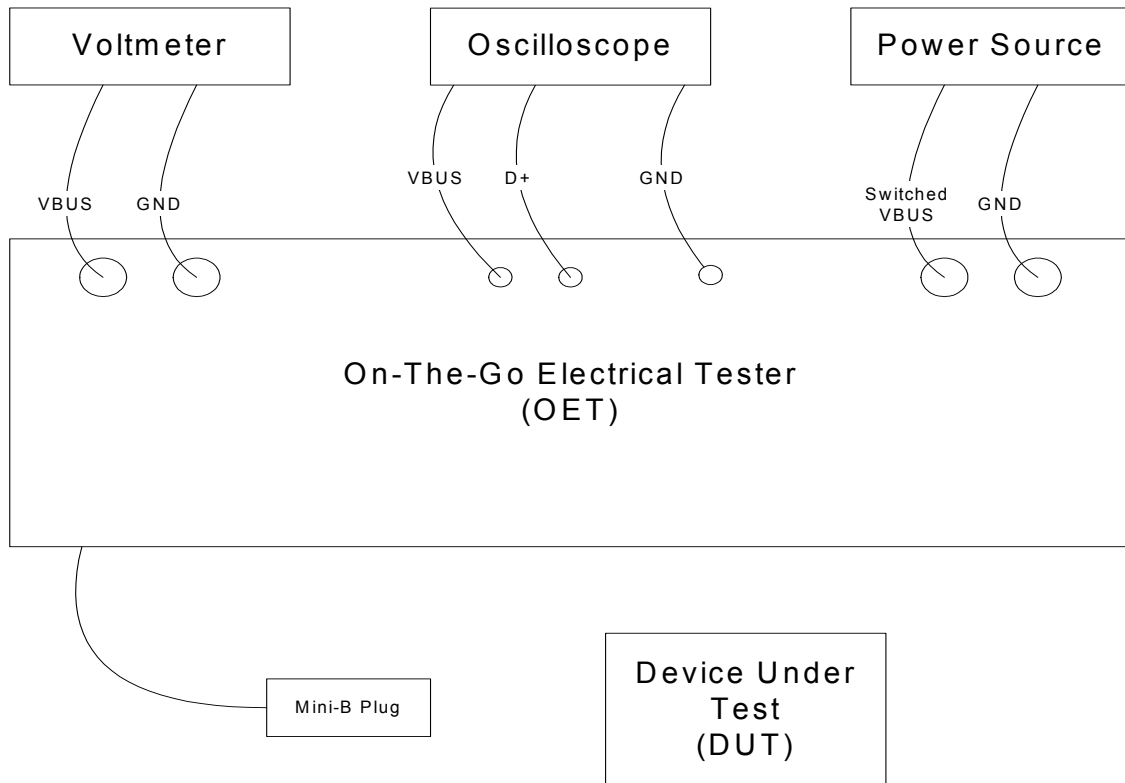


Figure 5-2 OTG Electrical Test Setup

Note: The OET Electrical Test Setup could be automated if the test equipment supports external communications, such as GPIB, and there is the addition of a PC to control the test equipment and the OET.

5.4.1 Description of OTG Electrical Test Setup components:

Table 5-4 lists the OTG Electrical Test Setup equipment. The OTG Electrical Test Setup equipment was chosen to match the equipment listed in the USB-IF Full and Low Speed Compliance Test Procedure to minimize testing costs wherever possible.

Table 5-4 OTG Electrical Test Setup Equipment

Item	Description/Model	Qty
Oscilloscope	Tektronix TDS 684C, 784C or equivalent	1
TDS Probes	P6243 voltage probes	2
Multimeter (Voltmeter)	Keithley 2000 Multimeter or equivalent	1
Power Source	Agilent E3631A or equivalent	1
OET Test Board	OTG Electrical Tester	1

5.5 Electrical Tests

The electrical tests in this section are shown in the same order as the parameters in Table 5-1 DC Electrical Characteristics of the OTG Supplement to the USB 2.0 Specification where possible.

5.5.1 vBUS Voltage Tests

5.5.1.1 A-UUT Output Voltage (V_{A_VBUS_OUT})

Test Setup	OTG Electrical Test Setup
Purpose	To verify that the A-UUT can maintain voltage V _{A_VBUS_OUT} while supplying the minimum required and maximum supported output current.
Description	This test measures the voltage at the minimum required output current and determines the maximum supported output current.
Checklist Items	E1, E8

Procedure	<ol style="list-style-type: none"> 1. Set OET to 8 mA Load mode 2. Connect A-UUT to mini-B plug. 3. Use the manufacturer documented procedure to raise VBUS 4. Recommended oscilloscope settings: Trigger oscilloscope when VBUS voltage reaches 4.4 Volts (minimum VA_VBUS_OUT value). If oscilloscope does not trigger, device may not be able to provide 8 mA and fails this test. 5. Check that VBUS remains above 4.4 (VA_VBUS_VLD) volts for at least one second after first reaching 4.4 volts. It can not drop below 4.4 volts during this time. 6. Set OET to variable resistance mode. 7. Determine the resistance where VA_VBUS_OUT fails to stay in the valid range. Note: This is the maximum rated load for the device. If the device never fails its maximum rated load is 100 mA. 8. If the load has not exceeded the product rating the test fails.
Pass Criteria	<p>Voltage (VA_VBUS_OUT) stays in valid range of 4.4 to 5.25 Volts</p> <p>The maximum rated load is greater than or equal to the manufacturer's rating.</p>

5.5.1.2 A-UUT VBUS Rise Time (TA_VBUS_RISE)

Test Setup	OTG Electrical Test Setup
Purpose	To verify the VBUS Rise Time (TA_VBUS_RISE).
Description	This test measures the rise time VBUS (TA_VBUS_RISE).
Checklist Items	E3

Procedure	<ol style="list-style-type: none"> 1. Set OET to 8 mA Load mode 2. Connect device to mini-B plug 3. Use the manufacturer documented procedure to raise VBUS 4. Recommended oscilloscope settings: Trigger the oscilloscope when the VBUS voltage rises above 300mV. Set oscilloscope to 1V/div and 10ms/div 5. Measure the time it takes the VBUS voltage to rise from 200mV to 4.4 V and record the results. 6. Repeat the test using the manufacturer's rated load for the device.
Pass Criteria	VBUS rise time (TA_VBUS_RISE), measured from 200mV to 4.4V, is under 100 ms

5.5.1.3 A-UUT Leakage Voltage (VA_VBUS_LKG)

- Not tested at this time.

Note: The USB-IF backdrive test partially covers this requirement.

5.5.1.4 B-UUT (SRP capable) to OTG Device Output Voltage (VB_DRD_OUT)

Test Setup	OTG Electrical Test Setup
Purpose	To verify the minimum OTG Device Output Voltage (VB_DRD_OUT) is achieved and that the maximum output voltage is not exceeded.
Description	This test measures the peak voltage when a B-UUT initiates VBUS Pulsing to the OTG Device Duplicator.
Checklist Items	E5

Procedure	<ol style="list-style-type: none"> 1. Set OET to Passive OTG Device Duplicator mode 2. Connect B-UUT to mini-B plug 3. Use manufacturer documented procedure to initiate SRP. 4. Recommended oscilloscope settings: Trigger the oscilloscope when the VBUS voltage rises above 850mV. (Set oscilloscope to 1V/div and 4ms/div) 5. Record peak VBUS voltage 6. Repeat the test with the following capacitance and load settings: 1uF, 100 kOhms <p>Note: The OET may not support step 6.</p>
Pass Criteria	<p>Measured peak voltage is greater than or equal to the minimum OTG device Output Voltage (VB_DRD_OUT) of 2.1Volts.</p> <p>Measured peak voltage does not exceed 5.25 volts.</p>

5.5.1.5 B-UUT (SRP capable) to Host Output voltage (VB_HST_OUT)

Test Setup	OTG Electrical Test Setup
Purpose	To verify the maximum Host Output Voltage (VB_HST_OUT) is not achieved.
Description	This test measures the peak voltage when a B-UUT initiates VBUS Pulsing to the Passive PC Duplicator (non-OTG Host).
Checklist Items	E6
Procedure	<ol style="list-style-type: none"> 1. Set OET to Passive "PC" Duplicator mode 2. Connect B-UUT to mini-B plug 3. Use manufacturer documented procedure to initiate SRP. 4. Recommended oscilloscope settings: Trigger the oscilloscope when the VBUS voltage rises above 300mV. (Set oscilloscope to 1V/div and 4ms/div) 5. Record VBUS peak voltage
Pass Criteria	Measured peak voltage is less than or equal to the maximum Host Output Voltage (VB_HST_OUT) of 2.0 Volts.

5.5.1.6 B-UUT (SRP capable) Induced Transient (VB_DELTA_PK)

- Not tested at this time.

5.5.2 vBUS Current Tests

5.5.2.1 A-UUT Output Current (IA_VBUS_OUT)

- Test indirectly handled by the A-UUT Output Voltage (VA_VBUS_OUT) test

5.5.2.2 B-UUT (OTG Device) Unconfigured Average Current (IB_DRD_UNCFG)

Test Setup	USB-IF Current Measurement Test Setup
Purpose	To verify that the OTG device consumes less than or equal to the maximum allowed current in the On-The-Go supplement when unconfigured.
Description	This test can be performed during the USB-IF current measurement test using a more stringent current measurement.
Checklist Items	E9
Procedure	<ol style="list-style-type: none"> 1. Obtain the USB-IF Current Measurement Test results 2. Evaluate results with a lower limit of 150 uA.
Pass Criteria	Current measured at less than or equal to maximum (IB_DRD_UNCFG) of 150 uA.

5.5.3 Data-Line Voltage Tests

5.5.3.1 OTG Device Leakage (VDRD_DATA_LKG)

- Not tested at this time.

5.5.4 ID Resistance (Detection) Tests

5.5.4.1 Resistance to ground on Mini-B plug (RB_PLUG_ID)

- Not directly tested at this time.

5.5.4.2 Resistance to ground on Mini-A plug (RA_PLUG_ID)

- Not directly tested at this time.

5.5.5 Termination Tests

5.5.5.1 A-UUT Data Line Pull-down (RPD)

- Not tested at this time.

5.5.5.2 B-UUT Data Line Pull-down (RPD)

- Not tested at this time.

5.5.5.3 A-UUT VBUS Input Impedance to GND (RA_BUS_IN)

- Not tested at this time.

5.5.5.4 B-UUT VBUS SRP pull-up (RB_SRP_UP)

- Not tested at this time.

5.5.5.5 B-UUT VBUS SRP pull-down (RB_SRP_DWN)

- Not tested at this time.

5.5.6 Input Levels Tests

5.5.6.1 A-UUT VBUS Valid (VA_VBUS_VLD)

Test Setup	OTG Electrical Test Setup
Purpose	Verify the detection of a low voltage condition on VBUS.
Description	The test applies a 100mA load to VBUS to verify the A-UUT indicates a low voltage condition or properly supports the load.
Checklist Items	E1
Procedure	<ol style="list-style-type: none"> 1. Set OET to 100 mA Load mode 2. Connect A-UUT to mini-B plug 3. Use the manufacturer documented procedure to raise VBUS 4. Watch for an indication from the A-UUT of a low voltage condition. 5. For devices that do not provide a low voltage indication, verify that the VBUS voltage did not fall below VBUS Valid (VA_VBUS_VLD). Check that VBUS remains above 4.4 (VA_VBUS_VLD) volts for at least one second after first reaching 4.4 volts. It can not drop below 4.4 volts during this time.
Pass Criteria	<p>The low voltage indication occurs when the voltage falls below the minimum VBUS Valid (VA_VBUS_VLD) voltage of 4.4 Volts.</p> <p>If the rated current is 500 mA the voltage must not fall below 4.75 volts.</p>

5.5.6.2 A-UUT Session Valid (VA_SESS_VLD)

Test Setup	OTG Electrical Test Setup
Purpose	Verify the A-UUT SRP detection level (VA_SESS_VLD) is in the valid range. Note: This test is only valid for A-UUTs that support VBUS pulsing.
Description	The VBUS voltage is set below the minimum and above the maximum VA_SESS_VLD voltage range to verify that the A-UUT starts a session.
Checklist Items	E19
Procedure	<ol style="list-style-type: none"> 1. Set OET to A-Device VBUS Level mode 2. Recommended oscilloscope settings: Set the oscilloscope to trigger when the VBUS voltage rises above 4.4 Volts (VA_VBUS_VLD) 3. Set the Power Supply voltage to 0 Volts 4. Connect A-UUT to mini-B plug 5. Raise the Power Supply voltage until the VBUS voltage is 750mV 6. Verify that a session does not start (VBUS does NOT increase and the oscilloscope does not trigger). 7. Increase the Power Supply voltage to 2.05 Volts 8. Verify that VBUS increased to VA_VBUS_VLD as the A-Device started a session. 9. Check that VBUS remains above 4.4 (VA_VBUS_VLD) volts for at least 1 second after first reaching 4.4 volts. It can not drop below 4.4 volts during this time.
Pass Criteria	<p>A session started when the VBUS voltage level (VA_SESS_VLD) was between 0.8 and 2 Volts.</p> <p>VBUS remains above 4.4 volts (VA_SESS_VLD) during the required window of time.</p>

5.5.6.3 B-UUT VBUS Valid (VB_SESS_VLD)

Test Setup	OTG Electrical Test Setup
Purpose	Verify the level of the B-UUT VBUS Valid (VB_SESS_VLD) is in the valid range and the appropriate data-line pullup is raised within 100 mS (TB_SVLD_BCON)

Description	The VBUS voltage is set below the minimum and above the maximum VB_SESS_VLD voltage range to verify that the B-UUT enables the appropriate data-line pullup within 100mS.
Checklist Items	E20
Procedure	<ol style="list-style-type: none"> 1. Set OET to B-Device VBUS Level mode 2. Recommended oscilloscope settings: Set the oscilloscope to trigger when the appropriate data-line voltage rises above 600mV 3. Set the VBUS voltage to 750mV 4. Connect B-UUT to mini-B plug 5. Verify that the B-UUT does not turn on a data-line pullup (Oscilloscope does not trigger). 6. Raise the VBUS voltage to 4.05V 7. Verify that the B-UUT raises a data-line pullup. The oscilloscope should trigger and show a voltage rise on the appropriate data-line 8. Record the time difference between when the VBUS voltage reached 4 Volts and the B-UUT pull-up was enabled. Note: this may be a negative number.
Pass Criteria	B-UUT raises data-line pullup less than 100mS after the VBUS (VB_SESS_VLD) voltage level is 4.0 Volts.

5.5.6.4 B-UUT Session End (VB_SESS_END)

- Not tested at this time.

5.5.7 Decoupling Capacitance Test

5.5.7.1 OTG Device VBUS Bypass Capacitance (CDRD_VBUS)

Test Setup	USB-IF In-rush Current Measurement Setup
Purpose	Verify the capacitance (CDRD_VBUS) of OTG Device by using the USB-IF in-rush current test.
Description	This test can be performed during the USB-IF current measurement test but with a more stringent current measurement.

Checklist Items	E21
Procedure	<ol style="list-style-type: none"> 1. Obtain the USB-IF in-rush current test results 2. Evaluate results with a lower limit of 33uC (instead of 50uC).
Pass Criteria	The in-rush current stays below 33uC.

5.5.8 Data-Line Pulsing Test

5.5.8.1 Data-Line Pulsing Test (TB_DATA_PLS)

Test Setup	OTG Electrical Test Setup
Purpose	Verify the duration of a Data-Line pulse (TB_DATA_PLS) of a B-UUT when performing SRP.
Description	This test verifies that an SRP pulse on the appropriate data line is in the range of 5 to 10 ms.
Checklist Items	E22
Procedure	<ol style="list-style-type: none"> 1. Set OET to Passive OTG Device Duplicator mode 2. Connect B-UUT to mini-B plug 3. Use the manufacturer documented procedure to initiate an SRP 4. Recommended oscilloscope settings: Trigger the oscilloscope when the appropriate data line voltage rises above 1 Volt 5. Measure duration of Data-Line pulse
Pass Criteria	The duration of the Data-Line pulse is in the range of 5 to 10 ms.

6 Protocol

6.1 Introduction

The Protocol testing area is divided into 2 sections. A-UUT and B-UUT.

The test descriptions and pass/fail criteria are written in terms of observable bus states and stimulus. Reference is made to the example state diagrams found in the OTG supplement as an aid to developers who followed these examples.

6.2 Equipment

6.2.1 Test Equipment

- PC
- OPT (can be a PCI card or the stand alone embedded that has the USB or RS232 serial interface to the PC)
- OTG protocol test software.
- mini-A to mini-B cable

6.2.2 OTG Protocol Tester (OPT)

The OTG Protocol Tester (OPT) is an OTG device that can perform testing of HNP/SRP protocols of the UUT. When in host role, it supports low speed and full speed. When in peripheral role, it supports full speed only. High-speed support will be in a future version of OPT.

6.2.3 Test Setup 1

In this setup, the mini-B plug is connected to the OPT. The mini-A plug is connected to UUT. The UUT is the default host.

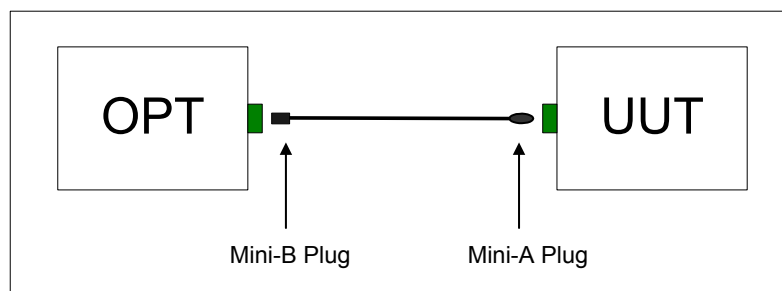


Figure 6-1 Protocol Test Setup 1

6.2.4 Test Setup 2

In this setup, the mini-A plug is connected to the OPT. The mini-B plug is connected to UUT. The UUT is the default peripheral.

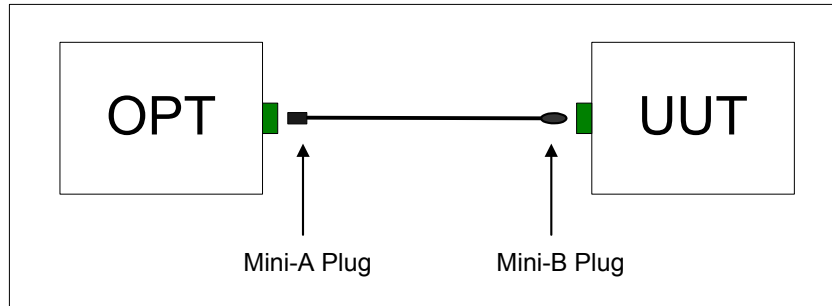


Figure 6-2 Protocol Test Setup 1

6.3 Unit Under Test Requirements

In order to validate the Protocol Compliance all OTG Units Under Test are expected to have the following implementation:

UUT must support a means of external initiation of SRP by the operator. This can be a button, a software setting etc...

For a usage based (VBUS off until SRP occurs) OTG-A device, if a OTG-B device starts a session by means of SRP, the OTG-A is expected to set the feature `b_hnp_enable` on OTG-B and go into suspend.

For an insertion based (VBUS on with connection) OTG-A device, if a OTG-B device is physically connected, the OTG-A is expected to set the feature `b_hnp_enable` on OTG-B and go into suspend.

The unit under test is expected to comply with all errata to the OTG supplement. In particular there are errata related to testability that specify UUT behavior with THE unsupported test device.

6.4 Tests

6.4.1 A-UUT

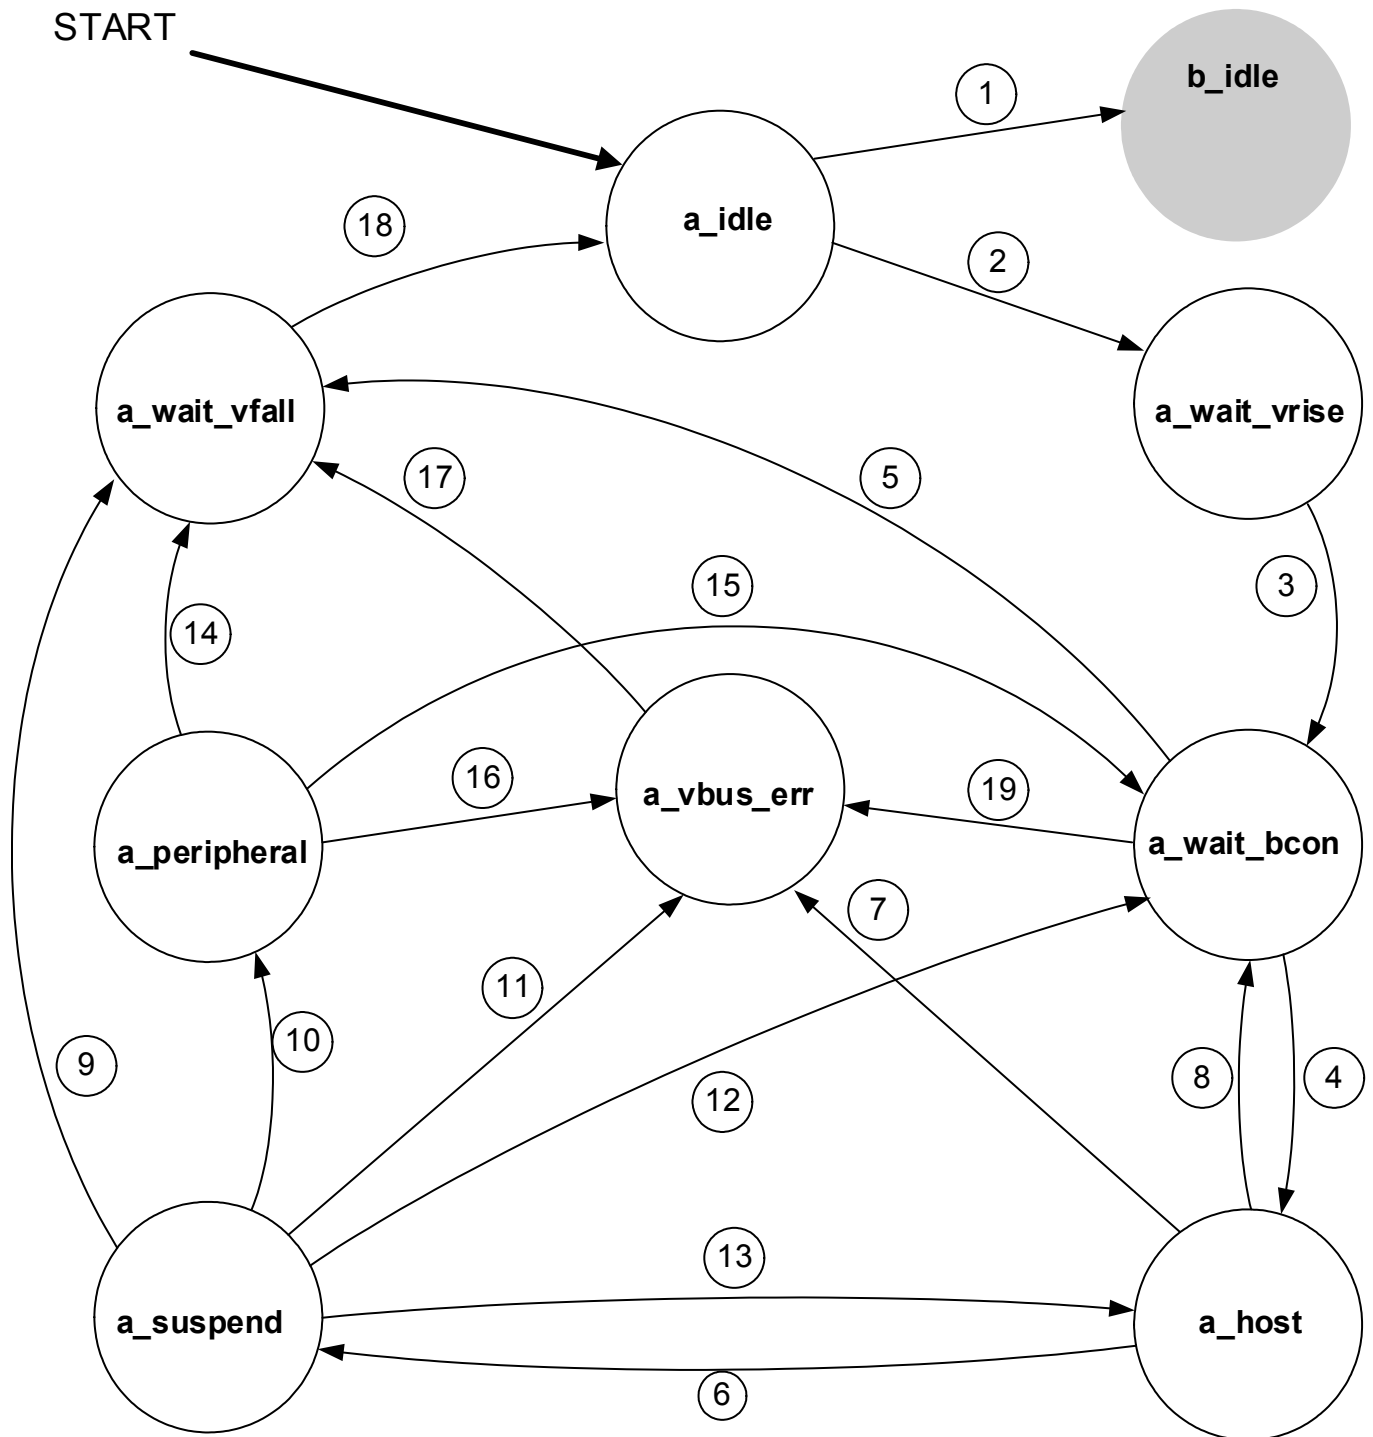


Figure 6-3 State Diagram A-UUT

Test Matrix A-UUT Tests

6.4.1.1 Test-flow A-UUT 1: SRP & HNP test

Test Setup

Use Test Setup 1.

Remark: After having established the cable connection between the 2 devices, both parties (A-UUT and B-OPT) will cycle through the test without the need for operator initiation if the A-UUT is an OTG device that turns on VBUS by means of ID detection. (Insertion Based OTG device)

If the A-UUT turns on VBUS after an SRP, the operator shall have to initiate the test (B-OPT performs SRP).

6.4.1.1.1 Test Initialization

Each of the protocol tests is written so that they can be run individually. Whenever a test tests a condition that happens several steps into the SRP/HNP process a standard initialization procedure is followed to get the device under test into the necessary starting state. This common procedure is documented here and referred to by each of the tests that use it for initialization. The procedure is as follows:

1. B-OPT disconnects by removing its pull-up.
2. B-OPT monitors VBUS until it is removed. If its not removed after 5 seconds software skips to step 4 and continues.
3. B-OPT issues an SRP with the following parameters.

D+ pull-up applied for 7.5 milliseconds.
VBUS driven to at least 2.1 volts.

NOTE: If the UUT is an insertion based device that never drops VBUS this step is skipped.

4. B-OPT connects D+ pull-up when VBUS reaches session valid for a B device.
5. B-OPT enumerates normally and indicates HNP support when queried by the A-UUT.
6. B-OPT successfully acknowledges a Set Feature HNP_ENABLE when received.
7. When the B-OPT sees a suspend condition on the bus it waits for around 75 milliseconds and then disconnects.
8. When the A-UUT connects the B-OPT waits for .5 milliseconds and then drives a bus reset for 50 milliseconds.
9. The B-OPT attempts to enumerate the A-UUT as follows after the bus reset:
 - a. Get device descriptor using a maximum packet size of 64. (This will cause a short packet for devices with maxpacketize0 < 64)
 - b. Issue a Set Address command with the next available USB address.
 - c. Get the device descriptor again with the right maximum packet size.
 - d. Get configuration descriptor asking for a number of bytes equal to configuration descriptor size only.
 - e. Issue a Set Configuration command for the first configuration supported by the device.

- f. Get the configuration descriptor again asking for a number of bytes equal to the configuration descriptor size.
 - g. Get the configuration descriptor using the total length of the entire descriptor.
10. The B-OPT suspends the bus.
11. After the A-UUT disconnects as a peripheral the B-OPT connects in 100 milliseconds (if VBUS still present).

6.4.1.1.2 Test descriptions

TD.4.1 A-UUT Response to SRP

This test verifies that an A-UUT that supports SRP responds by starting a session after a valid SRP is issued by a connected device.

NOTE: If the UUT is an insertion based device that never drops VBUS this test is skipped.

Checklist Items: P26, P27

Starting Condition

A-UUT is not supplying VBUS. (A-IDLE). For some A-UUTs that supply VBUS when a cable is connected, device dependent steps may need to be followed to put the A-UUT into a state where VBUS is not provided with the B-OPT test device connected. If the device always supplies VBUS with the cable connected this test does not apply.

Overview of Test Steps

1. Connect the B-OPT tester to the A-UUT.
2. B-OPT verifies that VBUS is not present.
Note: Some A-UUTs may require device dependent procedures once the B-OPT is connected to drop VBUS.
3. B-OPT issues an SRP with the following parameters:
D+ Dataline pulsed for 5 milliseconds.
VBUS driven until reaching 2.1 volts. (Over as little as possible).
4. B-OPT starts a timer as soon as it stops driving VBUS.
5. B-OPT monitors VBUS levels. If VBUS never falls below session valid the test is successful. If VBUS falls below session valid – the B-OPT stops the timer when it again reach B session valid.
6. B-OPT monitors VBUS for 1 second to make sure that it remains supplied.
7. The test is repeated with the following SRP parameters.
D- Dataline Pulsed for 5 milliseconds.
VBUS driven until reaching 2.1 volts (Over as little as possible).

Results Interpretation

The test transcribes all results to a text based log file.

The test *fails* if:

- VBUS is not supplied within 30 seconds by the A-UUT.
- VBUS is supplied for less than 1 second by the A-UUT.
- Low speed devices are supported and VBUS is not supplied within 30 seconds by the A-UUT.
- An unsupported error message is not produced in response to the D- pulse case by an A-UUT that does not support LS devices.

TD.4.2 **A-UUT Reset on B Connect**

This test verifies that an A-UUT providing VBUS after an SRP request properly resets the bus when a device connects.

Checklist Items: P7, P28

Starting Condition

A-UUT is supplying VBUS in response to an SRP. The B-OPT has not yet connected its pull-up resistor to signal connect. (A_WAIT_BCON)

Overview of Test Steps

1. The first three steps of the A-UUT standard initialization procedure described in section 6.4.1.1.1 are followed.
2. The B-OPT connects its D+ pull-up resistor 100 milliseconds after VBUS reaches VB_SESS_VLD.

NOTE: In some cases VBUS may never fall below VB_SESS_VLD after the B-OPT SRP pulse. In this case B-OPT connects 100 milliseconds after it stops driving VBUS as part of the SRP pulse.

3. The B-OPT starts a timer as soon as it connects its D+ pull-up.
4. The B-OPT records the time until a bus reset occurs.

Results Interpretation

The test transcribes all results to a text based log file.

The test *fails* if:

- The A-UUT does not perform a bus reset within 30 seconds of B-OPT connect.
- The reset starts less than 100 milliseconds (debounce) from the B-OPT connect.

TD.4.3 **A-UUT Sends Set Feature HNP_Enable and Suspends**

This test verifies that an A-UUT providing VBUS after an SRP request properly starts an HNP transition when THE unsupported device connects to the bus. (A_HOST to A_SUSPEND)

Checklist Items: P29, P30

Starting Condition

A-UUT has reset the bus following a device connect after SRP.

Overview of Test Steps

1. The first four steps of the A-UUT standard initialization procedure described in section 6.4.1.1.1 are followed.
2. The B-OPT starts a timer.
3. The B-OPT reports HNP support if its descriptors are queried.
4. B-OPT acknowledges the Set Feature HNP_Enable command.
5. The B-OPT monitors for the suspend condition.

Results Interpretation

The test transcribes all results to a text based log file.

The test *fails* if:

- The A-UUT does not send a set feature b_hnp_enable to the B-OPT within 30 seconds of bus reset.
- The A-UUT sends a set feature b_hnp_enable after configuring the B-OPT without sending a set feature a_hnp_support before configuring the B-OPT.
- The A-UUT sends a get descriptor (OTG) at any point.
- The A-UUT sends a set feature A_ALT_HNP_SUPPORT at any time.
- The A-UUT does not suspend the bus (following a successful set feature hnp_enable) within 30 seconds of bus reset.
- User interaction is required for the HNP sequence to occur. (ie – acknowledging an unsupported device message).

TD.4.4 **A-UUT Transitions From Suspend to Peripheral In HNP Process.**

This test verifies that an A-UUT transitions from host to peripheral when the B-OPT disconnects during a suspend in the HNP process. (A_HOST to A_SUSPEND)

Checklist Items: P31, P20

Starting Condition

A-UUT has suspended the bus in the middle of an HNP sequence.

Overview of Test Steps

1. The first six steps of the A-UUT standard initialization procedure described in section 6.4.1.1.1 are followed.
2. The B-OPT detects 3 missing SOFs, waits for 1 ms and then disconnects.
3. The B-OPT starts a timer when it disconnects.
4. The B-OPT monitors for a connect from A-UUT and stops its timer when this occurs.

Note if D+ is already high and stays that way for TA_BDIS_ACON the test is successful.

5. The Test is repeated with the B-OPT waiting slightly less than 199 milliseconds to disconnect in step 2.

The test *fails* if:

- The A-UUT does not connect within TA_BDIS_ACON.
- The A-UUT exits suspend before the B-OPT disconnects.

TD.4.5 **A-UUT is Reset/Enumerated as Peripheral After HNP**

This test verifies that an A device enumerates correctly as a peripheral after an HNP handshake.(A_PERIPHERAL)

Checklist Items: P32

Starting Condition

B-OPT has disconnected from the bus in the middle of an HNP sequence.

Overview of Test Steps

1. The first seven steps of the A-UUT standard initialization procedure described in section 6.4.1.1.1 are followed.
2. The B-OPT starts a timer when the A-UUT connects.
3. The B-OPT drives reset for 10 milliseconds immediately after the connection.
4. The B-OPT ensures the A-UUT can be successfully enumerated following the procedure in section 6.4.1.1.1
5. The test is repeated with the following sets of parameters:
Delay For Reset Start: 0 ms Reset Duration: 50 ms
Delay For Reset Start: 2.9 ms Reset Duration: 10 ms
Delay For Reset Start: 2.9 ms Reset Duration: 50 ms
Delay for Reset Start: 0 ms Reset Duration: 100 ms
Delay for Reset Start: 2.9 ms Reset Duration: 100 ms

The test fails if:

- The A-UUT does not enumerate properly as a peripheral under any conditions.

TD.4.6 **After HNP B-OPT Performs Only Bus Reset Before Suspending**

This test verifies that an A-UUT successfully transitions back to waiting for a connect from the B device even when the B-OPT abruptly ends its role as host.

Checklist Items: P21

Starting Condition

B-OPT has performed a bus reset following the connection of the A-UUT as a peripheral.

Overview of Test Steps

1. The first eight steps of the A-UUT standard initialization procedure described in section 6.4.1.1.1 are followed.
2. After finishing driving bus reset the B-OPT performs no traffic and starts a timer.
3. The B-OPT monitors for VBUS dropping below VB_SESS_VLD and D+ disconnecting.
4. If VBUS is removed the B-OPT follows the standard A-UUT initialization procedure to ensure correct functionality (Steps 3-11).
5. If VBUS is not removed after 5 seconds the B-OPT connects and responds normally to a device enumeration sequence.

Note: The B-OPT must attempt to verify that VBUS is not decaying when it connects or the test result could be invalid.

The test fails if:

- The A-UUT drops D+ in less than 3 milliseconds (TA_BIDL_ADIS(min)) or more than 200ms (TA_BIDL_ADIS(max)).
- The A-UUT removes VBUS but does not properly respond to a legal SRP/HNP sequence.
- The-AUUT does not remove VBUS but does not respond normally to the B-OPT connecting after the HNP sequence.

TD.4.7 **A-UUT Reset on B Connect After HNP Cycle**

This test verifies that an A device providing VBUS after an HNP cycle properly resets the bus when a device connects. (A_WAIT_B_CON to A_HOST).

Note: If the A-UUT drops VBUS after the HNP cycle the B-OPT must initiate SRP to start a session and this test is no different than TD.4.2. The A-UUT is allowed to do this at any point in this test – even after the B-OPT has reconnected.

Checklist Items: P28

Starting Condition

A-UUT is supplying VBUS after an HNP transition. The B-OPT has not yet connected its pull-up resistor to signal connect again. (A_WAIT_BCON)

Overview of Test Steps

1. The first 11 steps of the A-UUT standard initialization procedure described in section 6.4.1.1.1 are followed.
2. The B-OPT connects its D+ pull-up resistor 100 milliseconds after A disconnects.
3. The B-OPT starts a timer as soon as it connects its D+ pull-up.
4. The B-OPT records the time until a bus reset occurs.
5. The test is repeated with the B-OPT connecting as close to 1 second (but not over) after the A-UUT drives VBUS to VB_SESSN_VLD.

Results Interpretation

The test transcribes all results to a text based log file.

The test *fails* if:

- The A-UUT does not perform a bus reset within 30 seconds of B connect.

TD.4.7a **A-UUT Provides VBUS and Recognizes a Device Connect For the Minimum Required Time.**

This test verifies that an A-UUT handles a device connect that happens just before 1 second after VBUS reaches session valid.

NOTE: If the UUT is an insertion based device that never drops VBUS this test is skipped.

Checklist Items:

Starting Condition

A-UUT is not supplying VBUS. (A-IDLE). For some A-UUTs that supply VBUS when a cable is connected, device dependent steps may need to be followed to put the A-UUT into a state where VBUS is not provided.

Overview of Test Steps

1. Connect the B-OPT tester to the A-UUT.
2. Follow the necessary procedure (device specific) to cause VBUS to be supplied.
3. The B-OPT starts a timer when VBUS reaches session valid (4.4 volts).
4. Slightly less than 1 second after VBUS reached 4.4 volts the B-OPT connects as a peripheral.
5. The B-OPT monitors for a bus reset and proper enumeration.

The test *fails* if:

- VBUS is dropped by the A-UUT before a successful enumeration has taken place.
- The B-OPT is not successfully enumerated within 30 seconds of connecting.

6.4.1.2 Test-flow A-UUT 2: Resume test

Test Setup

Use Test Setup 1.

Remark: After having established the cable connection between the 2 devices, both parties (A-UUT and B-OPT) will cycle through the test without the need for operator initiation if the A-UUT is a DRD that turns on VBUS by means of ID detection. (Insertion Based DRD)

If the A-UUT turns on VBUS after an SRP, the operator shall have to initiate the test (B-OPT performs SRP).

Test description

Note: There is an errata to the OTG supplement requiring that an A-UUT respond properly to resume signaling if it supports remote wakeup. This is required even if the A-UUT has not enabled the downstream device for remote wakeup.

TD.4.8 **A-UUT Response To Remote Wakeup Before HNP Handoff**

Note: This test is only run if the A-UUT supports remote wakeup. The test software must prompt to discover whether the test needs to be run.

This test verifies that an A device responds to a remote wakeup when it has suspended the bus as part of the HNP process.

Checklist Items: P33

Starting Condition

A-UUT is has suspended the bus and is waiting for the B-OPT to disconnect.
(A_SUSPEND)

Overview of Test Steps

1. The first six steps of the A-UUT standard initialization procedure described in section 6.4.1.1.1 are followed.
2. After the B-OPT sees 5 ms of suspend it drives resume for 1 millisecond.
3. B-OPT monitors to see that resume continues from the A-UUT.
4. The B-OPT starts a timer once resume finishes and records when the first subsequent command occurs and when SOFs begin
5. The test is repeated for the following parameters.

Suspend Time 5 ms	Resume Time 15 ms
Suspend Time 5 ms	Resume Time 1 ms
Suspend Time 150 ms	Resume Time 15 ms
Suspend Time 150 ms	Resume Time 1 ms

The test *fails* if:

- The A-UUT does not respond to remote wakeup by driving at least 20 ms of resume on the bus.
- The A-UUT drives resume for more than 30 seconds.
- The A-UUT does not start sending SOFs within 3 mS of the end of resume.
- The A-UUT attempts to access the B-OPT before 10 ms after the resume ends.

6.4.1.3 Test-flow A_UUT 3: Message Tests

Test Setup

Use Test Setup 1. The cable is initially unconnected for this test.

Test descriptions

TD.4.9 **A-UUT Produces A “Device No Response” Error Message**

This test verifies that an A-UUT produces a device not connected or not responding error message when an A-UUT bus request occurs and it is connected to an OPT programmed to act like a non-responsive device.

Note: This test does not apply to A-UUT devices that supply VBUS based on the insertion of the mini-A plug.

Checklist Items:

Starting Condition

The A-UUT and the B-OPT are not connected or are connected with the A-UUT not providing VBUS.

Overview of Test Steps

1. The B-OPT is programmed to not connect after VBUS becomes valid..
2. The first three steps of the A-UUT standard initialization procedure described in section 6.4.1.1.1 are followed.
3. The B-OPT does not connect after VBUS becomes valid.
4. The B-OPT displays a message 5 seconds after VBUS becomes valid.
5. The B-OPT displays a message 30 seconds after VBUS becomes valid.

The test *fails* if:

- The A-UUT does not produce a device not connected/not responding type error message after the 5 second message is displayed by the test software and before the 30 second message is displayed by the test software.

TD.4.10 **A-UUT Produces An “Unsupported Device” Message When The B Device Is Unsupported And Does Not Support HNP.**

This test verifies that an A-UUT produces a device not supported error message when a device it doesn't recognize uses SRP to start a session and does not support HNP.

Checklist Items:

Starting Condition

A-UUT is not supplying VBUS. (A-IDLE). For some A-UUTs that supply VBUS when a cable is connected, device dependent steps may need to be followed to put the A-UUT into a state where VBUS is not provided with the B-OPT test device connected.

Overview of Test Steps

1. The B-OPT is programmed to use a VID/PID that is not The Unsupported Device and is not on the A-UUT's targeted peripheral list. The B-OPT is also programmed to indicate that it does not support HNP.
2. The first four steps of the A-UUT standard initialization procedure described in section 6.4.1.1.1 are followed.
3. The B-OPT starts a timer after the A-UUT reads its device descriptor.
4. The B-OPT displays a message 30 seconds after the timer is started.

The test *fails* if:

The A-UUT does not produce an unsupported device message before the 30 seconds elapsed message is displayed by the test software.

TD.4.11

A-UUT Produces A “Device No Response” Error Message When The B Device Stalls Set_Feature B_HNP_ENABLE

This test verifies that an A-UUT produces a device not responding error message when a device it doesn't recognize uses SRP to start a session, indicates HNP support, but STALLs the Set Feature B_HNP_ENABLE request.

Checklist Items:

Starting Condition

A-UUT is not supplying VBUS. (A-IDLE). For some A-UUTs that supply VBUS when a cable is connected, device dependent steps may need to be followed to put the A-UUT into a state where VBUS is not provided with the B-OPT test device connected.

Overview of Test Steps

1. The B-OPT is programmed to use a VID/PID that is not The Unsupported Device and is not on the A-UUT's targeted peripheral list. The B-OPT is also programmed to indicate that it does support HNP. It is programmed to STALL a Set Feature B_HNP_ENABLE request when it occurs.
2. The first four steps of the A-UUT standard initialization procedure described in section 6.4.1.1.1 are followed.
3. The B-OPT starts a timer after it returns STALL on a Set Feature B_HNP_ENABLE request.
4. The B-OPT displays a message 30 seconds after the timer is started.

The test *fails* if:

The A-UUT does not produce a device not connected/not responding message before the 30 seconds elapsed message is displayed by the test software.

6.4.2 B-UUT

State Diagram

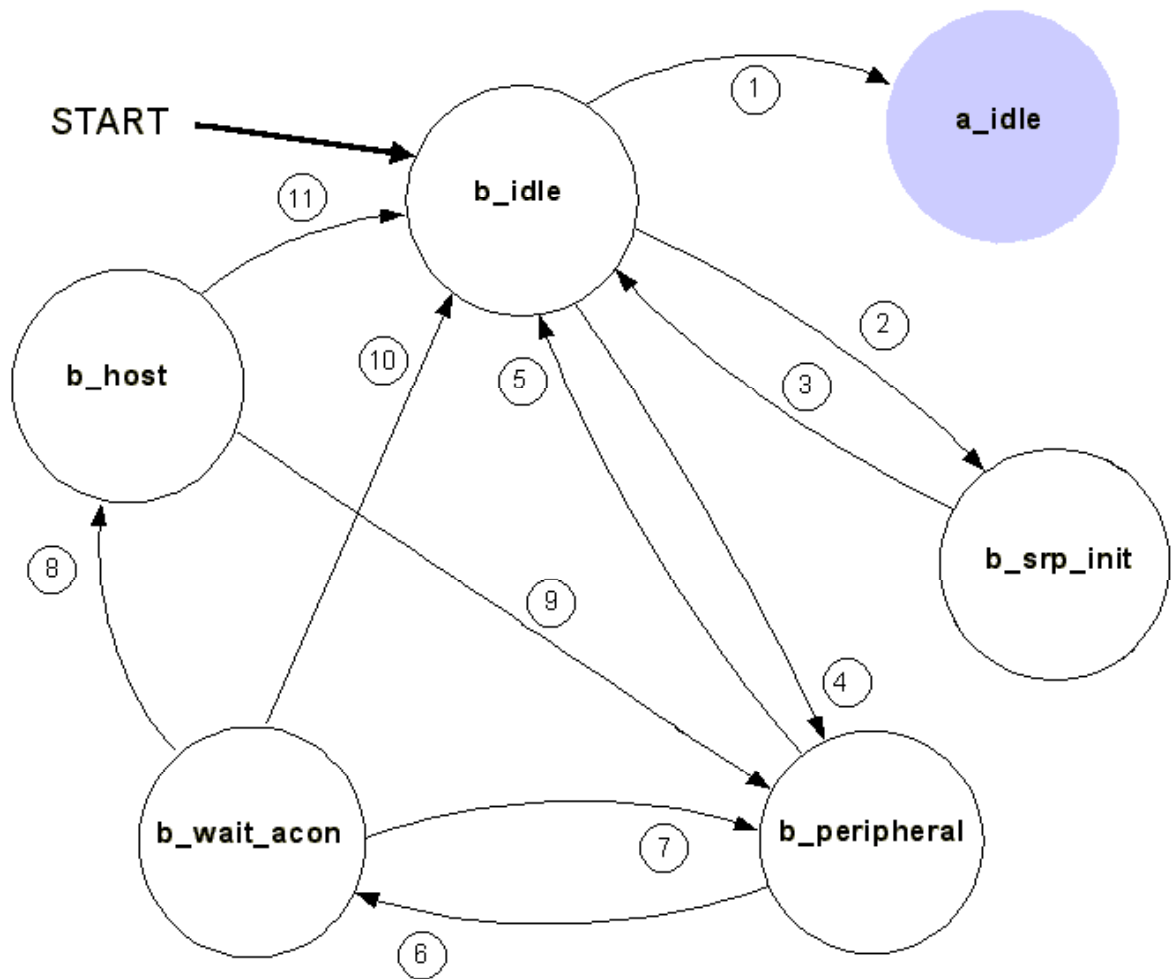


Figure 6-4 State diagram B-UUT

6.4.2.1 Test-flow B-UUT 1: SRP, HNP test

Test Setup

Use Test Setup 2.

6.4.2.1.1 Test Initialization: Standard Initialization For B-UUT Protocol Tests.

Each test is written to be run individually. Whenever a test tests a condition that occurs several steps into the SRP/HNP process a standard initialization procedure is followed to get the device under test into the necessary starting state. This common procedure is documented here and referred to by each of the tests that use it for initialization. The procedure is as follows:

1. The B-UUT issues an SRP to start a session with the A-OPT.
2. 100 milliseconds after VBUS begins to decay the A-OPT powers VBUS.
3. 100 milliseconds after the B-UUT connects the A-OPT drives reset for 50 milliseconds.
4. The A-OPT waits for 10 milliseconds.
5. The A-OPT enumerates the B-UUT as follows:
 - a. Get device descriptor using a maximum packet size of 64. (This will cause a short packet for devices with maxpacket size < 64)
 - b. The A-OPT sends a Set Feature b_hnp_enable
 - c. Issue a Set Address command with the next available USB address.
 - d. Get the device descriptor again with the right maximum packet size.
 - e. Get configuration descriptor asking for a number of bytes equal to configuration descriptor size only.
 - f. Issue a Set Configuration command for the first configuration supported by the device.
 - g. Get the configuration descriptor again asking for a number of bytes equal to the configuration descriptor size.
 - h. Get the configuration descriptor using the total length of the entire descriptor.
6. The A-OPT immediately suspends the bus after receiving the acknowledge for the handshake phase of the Get configuration descriptor command. The A-OPT waits for the B disconnect.
7. The A-OPT waits for 1.5 milliseconds and connects.
8. The A-OPT responds normally to configuration activity as a peripheral.
9. If the bus is suspended by the UUT (Host) the A-OPT disconnects as peripheral after detecting at least 3 milliseconds of suspend.

6.4.2.1.2 Test descriptions

TD.5.1 **B-UUT Connects Properly After Initiating SRP**

This test verifies that a B-UUT that has requested a session through the SRP protocol connects as a device within the required timing.

Checklist Items: E20

Starting Condition

A-OPT is not supplying VBUS. (A-IDLE). B-UUT is unconnected.

Overview of Test Steps

1. Connect the B-UUT to the A-OPT.
2. The test software prompts the user to generate an SRP. (If necessary)
3. The A-OPT starts providing VBUS immediately after 5 milliseconds of the SRP dataline pulse.
4. The A-OPT starts a timer when VBUS reaches VA_SESS_VLD.
5. A-OPT monitors for the B-UUT connect.
6. The test is repeated with the A-OPT providing VBUS slightly less than 5 seconds from the end of SRP. (VBUS starts to decay).

Results Interpretation

The test transcribes all results to a text based log file.

The test *fails* if:

- A valid SRP is not generated. (No sufficient length D+ data line pulse).
- The B-UUT does not connect within 100 milliseconds of VBUS reaching VA_SESS_VLD.

TD.5.2

B-UUT Receives Set_Feature HNP Related Commands Correctly At Different Stages of the Enumeration Sequence

This test verifies that the B-UUT responds successfully to Set Feature B_HNP_Enable command when it is sent in various locations throughout the enumeration sequence..

Checklist Items: P16

Starting Condition

B-UUT has connected to the bus after issuing an SRP to request a session from the A-OPT.

Overview of Test Steps

1. The first two steps of the Standard Initialization For B-UUT Protocol Tests described in section **6.4.2.1.1** are followed.
2. The A-OPT drives reset for 50 milliseconds starting 100 milliseconds after the B-UUT connects.
3. The A-OPT waits for 10 milliseconds.
4. The A-OPT performs the standard enumeration sequence defined in section **6.4.2.1.1**.
5. Steps 1-4 are repeated with the Set Feature B_HNP_Enable sent when the device is addressed (but not configured).
6. Steps 1-4 are repeated with Set Feature A_HNP_Support sent when the device is in the default state and Set Feature B_HNP_ENABLE sent after it is configured.
7. Steps 1-5 (the entire test with Set Feature B_HNP_ENABLE sent with the device in different states) is repeated with the following sets of timing parameters:

Time After Connect To Reset	100 milliseconds
Reset Length	30 milliseconds
Time After Reset To First Command	10 milliseconds
Time After Connect To Reset	1 second
Reset Length	30 milliseconds
Time After Reset To First Command	10 milliseconds

Time After Connect To Reset	1 second
Reset Length	50 milliseconds
Time After Reset To First Command	10 milliseconds

Time After Connect To Reset	100 milliseconds
Reset Length	1 second
Time After Reset To First Command	10 milliseconds

Time After Connect To Reset	100 milliseconds
Reset Length	50 milliseconds
Time After Reset To First Command	1 second

The test *fails* if:

- The B-UUT fails to enumerate in any scenario.
- The B-UUT does not accept a Set Feature B_HNP_Enable command in any device state.

TD.5.3 **B-UUT Disconnects Within The Allowed Window After Accepting A Set Feature B_HNP_Enable Command.**

This test verifies that the B-UUT disconnects within the appropriate timeframe after the A-OPT has suspended the bus for an HNP transition.

Checklist Items: P10, P34

Starting Condition

B-UUT has successfully acknowledged a Set Feature B_HNP_Enable command and is waiting for the A_OPT to suspend the bus.

Overview of Test Steps

1. The first five steps of the Standard Initialization For B-UUT Protocol Tests described in section 6.4.2.1.1 are followed.
2. The A_OPT directly suspends the bus after the Set Feature B_HNP_Enable command is accepted.
3. The A_OPT starts a timer after 3 milliseconds of suspend.
4. The A_OPT records when the B-UUT disconnects.
5. The test is repeated with the A_OPT waiting slightly less than 30 seconds before suspending the bus.
6. The test is again repeated with the A_OPT waiting 2 minutes after the Set Feature B_HNP_Enable to suspend the bus (and finishing the standard sequence through step 5).

The test *fails* if:

- The B-UUT disconnects less than 5 milliseconds after the start of suspend.
- The B-UUT does not disconnect within 150 milliseconds of the start of suspend.

TD.5.4 **B-UUT Becomes Host and Drives Reset To Complete HNP Transition.**

This test verifies that the B-UUT assumes the role of host and drives a reset after the A-OPT has connected as a peripheral after an HNP sequence.

Checklist Items: P14, P15

Starting Condition

B-UUT has disconnected from the bus following a suspend as part of the HNP sequence.

Overview of Test Steps

1. The first six steps of the Standard Initialization For B-UUT Protocol Tests described in section 6.4.2.1.1 are followed.
2. The A-OPT connects immediately.
3. The A-OPT monitors for SE0 on the bus.
4. The A-OPT monitor for reset start time reset duration.
5. The test is repeated with the A-OPT connecting slightly before 3 milliseconds from the B-UUT disconnect.

The test *fails* if:

- The B-UUT does not drive a reset.
- The B-UUT reset length is less than 50 milliseconds.
- The B-UUT drives a reset starting more than 1 millisecond from the A-OPT connect.

TD.5.5 **B-UUT Ends Session For The Unsupported Device After Becoming Host.**

This test verifies that the B-UUT ends its session after becoming host for the unsupported device.

Checklist Items: P35

Starting Condition

B-UUT has become host after an HNP transition.

Overview of Test Steps

1. The first 7 steps of the Standard Initialization For B-UUT Protocol Tests described in section 6.4.2.1.1 are followed.
2. The A-OPT waits for a reset.
3. The A-OPT starts a timer..
4. The A-OPT responds normally to standard peripheral requests from the B-UUT as host..
5. The A-OPT monitors for a suspend state on the bus.

The test *fails* if:

- The A-OPT does not receive a get device descriptor request after the B-UUT has become host.
- The A-OPT receives a Get Descriptor (OTG) command from the UUT after it becomes peripheral.
- The A-OPT receives a Set Feature A_ALT_HNP_SUPPORT after it becomes peripheral.
- The A-OPT does not receive a reset after the B-UUT has become host.
- The B-UUT does not suspend the bus within 30 seconds of assuming the role of host.

TD.5.6 **After Ending Session for The Unsupported Device B-UUT Transitions Back to Peripheral**

This test verifies that the B-UUT transitions back to the peripheral state after ending a session to the unsupported device.

Checklist Items:

Starting Condition

B-UUT has suspended the bus to end the session after becoming host.

Overview of Test Steps

1. The first 9 steps of the Standard Initialization For B-UUT Protocol Tests described in section 6.4.2.1.1 are followed.
2. The A-OPT monitors for the B connect.
3. The A-OPT performs steps 3-5 of the standard initialization sequence in section 6.4.2.1.1

The test *fails* if:

- The B-UUT does not reconnect as a peripheral within 200 milliseconds of the A disconnecting.
- The B-UUT does not respond normally to any part of the standard enumeration sequence after connecting.

6.4.2.2 Test-flow B-UUT2: Message Tests

Test Setup

Use Test Setup 2.

Test descriptions

TD.5.7 **B-UUT Displays A “Device No Response” Error Message When An Attempt To Start A Session Fails.**

This test verifies that the B-UUT displays an error message when it is unable to start a session. The B-UUT is connected to a non-responsive A-OPT for this test.

Checklist Items:

Starting Condition

A-OPT is not supplying VBUS. (A-IDLE). B-UUT is unconnected or connected.

Overview of Test Steps

1. Connect the B-UUT to the A-OPT (if necessary).
2. The test software prompts the user to generate an SRP. (If necessary)
3. The A-OPT starts a timer after detecting SRP. It does not supply VBUS.
4. 5 seconds after starting the timer the A-OPT displays a message indicating that 5 seconds has elapsed.
5. 30 seconds after starting the timer the A-OPT displays a message indicating that 30 seconds have elapsed.

The test *fails* if:

- The B-UUT does not display a device not connected or not responding type error message between the 5 and 30 second messages.

TD.5.8 **B-UUT Displays “Unsupported Device” Error Message**

This test verifies that the B-UUT displays an unsupported device error message when it becomes host and enumerates the A-OPT which is programmed to have an unsupported Vendor and Device ID.

Checklist Items:

Starting Condition

B-UUT has become host after an HNP transition.

Overview of Test Steps

1. The A-OPT is programmed to use a VID/PID that is not The Unsupported Device and is not on the B-UUTs targeted peripheral list.
2. The first 8 steps of the Standard Initialization For B-UUT Protocol Tests described in section **6.4.2.1.1** are followed.
3. The A-OPT starts a timer after its device descriptor is read by the B-UUT.
4. The A-OPT responds normally to all configuration requests.
5. The A-OPT displays a message that 30 seconds have elapsed when the timer started in step 3 reaches 30 seconds.

The test *fails* if:

The B-UUT does not display an unsupported device error message before 30 seconds.

TD.5.9

B-UUT Displays A “Device No Response” Error Message When HNP Fails

This test verifies that the B-UUT displays an error message when it starts a session and HNP fails.

Checklist Items:

Starting Condition

A-OPT is not supplying VBUS. (A-IDLE). B-UUT is unconnected or connected.


Overview of Test Steps

1. The A-OPT is programmed to use a VID/PID that is not The Unsupported Device and is not on the B-UUTs targeted peripheral list.
2. The first 6 steps of the Standard Initialization For B-UUT Protocol Tests described in section **6.4.2.1.1** are followed.
3. The A-OPT starts a timer after it suspends the bus as part of HNP. It performs no further actions.
4. The A-OPT displays a message that 30 seconds have elapsed when the timer started in step 3 reaches 30 seconds.
5. The test is repeated with the A-OPT dropping VBUS after suspending the bus.

The test *fails* if:

The B-UUT does not display a device not responding or not connected type error message before 30 seconds.

6.4.3 Peripheral Only

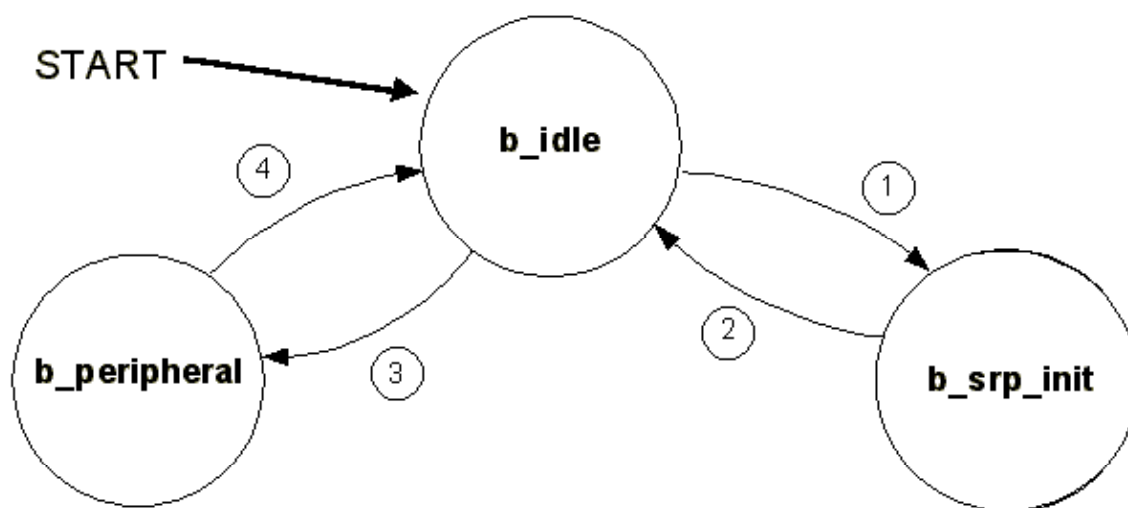

A peripheral that supports SRP must pass the section 5 SRP related electrical testing.

7 Messaging

7.1 Overview

Section 3.4 “No Silent Failures” of the On-The-Go Supplement to the USB 2.0 Specification version 1.0 states:

“Whenever the cabling allows USB devices to be connected, and the devices do not support the type of communication being requested by the user, then the devices shall provide messages to the user that allow him or her to understand the problem, and correct it if possible. Insofar as is possible, the messages shall be self explanatory, and shall not require the user to reference a manual or other additional material.”

The On-The-Go Supplement to the USB 2.0 Specification does not define messages so it is beyond the scope of the OTG Compliance Document to do so. However, suggested messages for particular events are provided as a guideline.

Some messaging options may not be acceptable. Take the example of an OTG device with one LED. A device like this may not be able to provide multiple messages that are self-explanatory. It is the responsibility of the manufacturer to verify that the content of the messages supplied comply with the intent of the specification.

The message checklist defined in this document can be used to verify that messages are provided under specific events or conditions. There are several cases where messages **MUST** be provided. However, the content of the messages will **NOT** be verified, since the language of the messages can be subjective to each user.

7.2 Minimum Required Messages

Two error messages are required at a minimum for devices that do not support hubs. The first message indicates when a device is not connected or is not responding correctly. The second message indicates that a device is unsupported because it is not on the Targeted Peripheral list, draws too much current, and/or etc. A third message is required for devices that support hubs. Suggested text for the messages might be:

- “Device Not Connected/Responding”
- “Attached Device Not Supported”
- “Unsupported Hub Topology” (If A-Device supports Hubs)

The following table lists the events that require error messages in the OTG Supplement. Suggested message text is supplied as a guideline to help manufacturers be consistent.

Event Description	Suggested Message Text	OTG Supplement Section
B-Device draws more current than A-Device supports	A-Device Message: “Attached device Not Supported”	5.1.3
B-Device (not HNP capable) not on A-Device Targeted Peripheral List	A-Device Message: “Attached device not supported”	6.8.1.4
A-Device not on B-Device Targeted Peripheral List	B-Device Message: “Attached device not supported”	6.8.2.5

A-Device timed out to B-Device SRP	B-device message: "Device not connected/responding "	6.8.2.2
An nth-tier Hub attached to an A-Device with (n-1) tier Hub support.	A-Device message: "Unsupported Hub Topology"	3.4
Unsupported Hub Topology attached to an A-Device with Hub support.	A-Device message: "Unsupported Hub Topology"	3.4

A simple OTG device without hub support might be implemented with two LEDs that are clearly labeled with the required error messages.

7.3 Additional Messages

Manufacturers are allowed to provide additional messages as appropriate to help a user understand possible failures.

7.4 Compliance tests

Most of the compliance tests for messaging are performed with the OPT. These tests are defined in Section 6 of this specification. The hub messages are tested during interoperability testing.

MA3	A-device Invalid Hub topology
Start State	A-UUT attached to an unsupported hub topology (too many levels or too many devices – what this requires will depend on the manufacturer)
Stimulus	Perform procedure to cause a bus request on the A-UUT
Observation	Observe messaging behavior on A-device
Pass/Fail	Pass if A-device displays 'Invalid Hub Topology message Fail if no message is shown

This test is only required if the A-device supports hubs and the A-device supports limited hub topologies.

8 Interoperability

8.1 Introduction

Devices, acting as a host, are only tested for interoperability with peripherals from the device's own Targeted Peripheral List.

8.2 Targeted Peripheral List

Any OTG device, acting as a host, must work with all the peripherals listed on the device's Targeted Peripheral List.

The manufacturer of an OTG device is expected to provide a subset of the peripheral(s) from the device's Targeted Peripheral List for testing. It is required that the OTG device, acting as a host, demonstrates appropriate functionality with the peripheral(s) supplied from the device's Targeted Peripheral List.

The manufacturer is responsible for verifying that the OTG device supports all the peripherals listed on the device's Target Peripheral List. If an OTG device is found NOT to work with a peripheral on the device's Targeted Peripheral List, all of the OTG devices on the shelves could be recalled.

8.3 OTG Peripheral Types

OTG Peripheral Types may be defined by the DWG and each type will have its own type specification.

Any OTG device, acting as a host, that claims to support an OTG Peripheral Type shall be tested with a peripheral of that type.

The manufacturer is expected to provide a peripheral of each supported OTG Peripheral Type for testing. It is only necessary to test with one peripheral of each supported OTG Peripheral Type.

As OTG Peripheral Type devices become available, a "golden" peripheral of each type shall be used instead of the manufacturer provided test peripheral devices.

Any host or OTG device that claims to support an OTG Peripheral Type must also support the Peripheral Type when it is implemented in a composite peripheral.

8.4 Compliance Tests

I1	Targeted Peripheral List Interoperability
Start State	A-UUT attached to a device on the targeted peripheral list for that device (provided by manufacturer).
Stimulus	Perform procedure to cause a bus request on the A-UUT
Observation	Observe messaging behavior on A-device
Pass/Fail	Pass if A-device does not display 'Unsupported Device' or 'Device not attached' messages and device can demonstrate normal operation. Fail if any error message is shown

9 USB-IF Required Tests

Devices supporting features of the On-The-Go supplement to the USB 2.0 specification must undergo additional testing beyond the tests described in this document. This additional testing is a subset of existing tests for USB peripherals and USB host controllers. This section of the document describes exactly what tests are required for full USB-IF certification and provides pointers to the locations where these tests are documented. Devices are split into multiple categories in this section as follows:

- **SRP Capable Peripheral:** Device that is capable of generating SRP to attempt to start a session when VBUS is not present.
- **FS Capable OTG Device:** OTG device capable of full speed signaling as a host but not capable of HS signaling as a host.
- **HS Capable OTG Device:** OTG Device capable of high speed signaling as a host.
- **SRP Capable Host:** The OTG supplement specifies that any host controller can respond to and support SRP. The compliance plan does not currently specify what tests apply to this type of host controller or how this type of host controller gets identified.

Note: These types are not mutually exclusive. An HS Capable OTG device can also support SRP generation as a device, etc. A single device could fit into multiple categories.

9.1 USB-IF Peripheral Testing

All USB-IF standard peripheral tests are required for SRP Capable Peripherals, FS Capable OTG devices, and HS Capable OTG devices. References to documentation for the standard USB-IF peripheral compliance tests as well as any necessary modifications to the procedures are described below.

Note: As with all peripherals, devices that are high speed capable as a peripheral must function at full speed and pass all HS and FS tests.

The complete set of USB-IF tests for peripherals are documented as follows:

9.1.1 Interoperability

USB-IF Full and Low Speed Electrical and Interoperability Compliance Test Procedure

http://www.usb.org/developers/docs.html#legacy_test_procedures

9.1.2 Full Speed/Low Speed Electricals

USB-IF Full and Low Speed Electrical and Interoperability Compliance Test Procedure

http://www.usb.org/developers/docs.html#legacy_test_procedures

9.1.3 High Speed Electricals

High-Speed Electrical Test Specification (Version 1.00)

http://www.usb.org/developers/docs.html#legacy_test_procedures

9.1.3.1 Procedures for specific test equipment

High-Speed Electrical Test Procedures for Tektronix Test Equipment (Version 1.0)

- [Device High-speed Electrical Test Procedure](#) (pdf, 623k) - for Tektronix Test Equipment

High-Speed Electrical Test Procedures for Agilent Test Equipment (Version 1.0)

- [Device High-speed Electrical Test Procedure](#) (pdf, 549k) - for Agilent Test Equipment
http://www.usb.org/developers/docs.html#legacy_test_procedures

9.1.4 OTG Required Peripheral Test Modifications

Note: Dealing with new cable options. Since peripherals following the On-The-Go supplement have new cable options there are some new cases to be handled by/with test fixtures used for peripheral electrical tests and for interoperability testing.

9.1.4.1 Interoperability

For all interoperability testing a Mini-A receptacle to Standard-A plug will be used with all captive cables. The particular Mini-A receptacle to Standard-A plug to be used by the official interoperability procedures will be specified in the future. For cases where the peripheral under test has a mini-B or mini-AB receptacle a 4.5 meter USB-IF certified mini-B to standard – A cable will be used.

9.1.4.2 Electrical

The standard peripheral electrical test fixtures will be used with devices with mini-AB or mini-B receptacles by using a Mini-B plug to Standard B receptacle adaptor. Note – this is not a legal adaptor and will be used only for electrical testing purposes. For captive cable devices with a mini-A plug – a standard Mini-A receptacle to Standard-A plug will be used. Using the adaptor the tests will be performed in the standard fashion for captive cable peripherals.

9.1.4.3 Current Measurements Modifications

Current consumption measurements of peripherals in the unconfigured, configured, suspended, and addressed states are made as normal. However, the passing values are different as noted below:

OTG Device as Peripheral: Unconfigured Current < 150 uA.

SRP capable peripherals, FS capable OTG Devices, and HS capable OTG Devices must perform all peripheral tests described in the documents above.

9.1.4.4 Additional tests for devices capable of initiating SRP

Additional tests for SRP capable devices are described in this document. The list of required tests is listed in table 5-2.

9.1.4.5 OTG Device as Peripheral With Dead Battery

There are no clear requirements in the On-The-Go supplement to the USB 2.0 specification with regards to how a DRD should behave as a peripheral if its battery has become depleted. This section attempts to specify a baseline for common behavior. The OTG supplement says that an OTG device without a battery (or with a dead battery) is allowed to function as a standard USB peripheral. It is also allowed to do absolutely nothing. These are the only options. These requirements are tested by performing the following tests for an OTG device when it has a dead battery (or the battery is removed).

1. Run the Chapter 9 USBCV test with the OTG device connected to a standard host.
2. Record the reported current consumption of the device. If the device does not enumerate, the allowed current consumption for the unconfigured device is zero.
3. Run the standard USB-IF current consumption tests. If the device passed USBCV the standard current rules apply. If the device failed USBCV – the unconfigured current must be zero.

9.2 USB-IF Host Testing

All standard USB-IF host testing as documented in the following references is required for OTG devices. Any exceptions or changes from the documented tests are explained in the following sections.

9.2.1 Interoperability

USB-IF Full and Low Speed Electrical and Interoperability Compliance Test Procedure

http://www.usb.org/developers/docs.html#legacy_test_procedures

9.2.2 Full Speed/Low Speed Electricals

USB-IF Full and Low Speed Electrical and Interoperability Compliance Test Procedure

http://www.usb.org/developers/docs.html#legacy_test_procedures

9.2.3 High Speed Electricals

High-Speed Electrical Test Specification (Version 1.00)

http://www.usb.org/developers/docs.html#legacy_test_procedures

9.2.4 Procedures for specific test equipment

High-Speed Electrical Test Procedures for Tektronix Test Equipment (Version 1.0)

- [Host High-speed Electrical Test Procedure](#) (pdf, 1,026k) - for Tektronix Test Equipment

High-Speed Electrical Test Procedures for Agilent Test Equipment (Version 1.0)

- [Host High-speed Electrical Test Procedure](#) (pdf, 734k) - for Agilent Test Equipment

http://www.usb.org/developers/docs.html#legacy_test_procedures

9.2.5 OTG Required Host Interoperability Testing Modifications

Current USB-IF host interoperability procedures are defined for Windows 98, Windows 2000, and Windows XP and require peripheral drivers for a number of peripherals defined in a standard interoperability gold tree. Host logo testing is currently not supported for any hosts that do not fit into one of these defined interoperability procedures. As hosts, OTG devices are not required to support hubs, low speed peripherals, or to provide support for HID or any other standard USB device class. These allowances are specified in the On-The-Go Supplement to the USB 2.0 Specification. The only peripherals that are required to work with the DRD as a host are the items on the DRDs targeted

peripheral list. There are two different versions of the basic DRD as host interoperability procedure. The procedure is differentiated by whether any hubs appear on the targeted peripheral list of the DRD.

9.2.5.1 Interop Procedure – No Hubs

One peripheral from the targeted peripheral list must be provided along with instructions on how to operate the peripheral. If any peripherals on the targeted peripheral list do not have a captive cable – the peripheral provided must not have a captive cable. The peripheral will be plugged into the OTG device using a 4.5 meter Mini-A plug to Mini-B cable or Mini-A plug to standard B cable as appropriate. The procedure to operate the device will be followed and the result must be successful.

9.2.5.2 Interop Procedure – Hubs

If any hubs appear on the OTG devices targeted peripheral list the OTG device must still supply a peripheral following the criteria listed above in the No-Hubs interop procedure. The difference is that the peripheral from the target list will be tested by plugging it in at the end of the full USB-IF gold tree as defined in the USB-IF Full and Low Speed Electrical and Interoperability Compliance Test Procedure. The targeted peripheral must still demonstrate functionality at the end of the defined gold tree. Other peripherals in the gold tree are not required to function unless they appear on the OTG devices targeted peripheral list.

Note: The OTG device is not required to support 5 levels of hub. If plugging targeted peripheral into the end of the USB-IF gold tree produces a hub topology error message levels of hub must be removed one at a time until the targeted peripheral operates correctly.

Sections 7 and 8 provide more details on the messaging and interoperability tests for OTG devices.

9.2.6 OTG Required Host Electrical Test Modifications

9.2.6.1 Host Full and Low Speed Electrical Testing

Host full and low speed electrical testing is performed for an OTG device acting as host in the exact same fashion as described in the USB-IF Full and Low Speed Electrical and Interoperability Compliance Test Procedure. To obtain full and low speed signaling for measurements the OTG device must provide peripherals that will enumerate at full speed. A low speed peripheral must be provided if the OTG device supports low speed devices as a host. The full and low speed electrical tests described in the USB-IF procedure are performed by capturing the traffic when the devices undergo enumeration. A mini-A plug to standard-A receptacle adapter is used for all the tests so that existing USB-IF test fixtures can be used.

Drop testing is the only significant case where the test procedure for a DRD acting as a host differs significantly from the existing USB-IF FS/LS capable host test procedures. Drop testing for a DRD acting as a host is described separately below:

9.2.6.1.1 Drop Testing

Drop testing for host controllers in the USB-IF full and low speed electrical test procedures places either 100 mA (low powered) or 500 mA (high powered) loads on all host ports and verify the VBUS has not dropped below required levels on any of the ports. If an OTG DRD supplies somewhere between 8 mA and 100 mA on its port the currently defined USB-IF drop test is not sufficient to check VBUS under worst case loading conditions. Furthermore, there is no hardware based reporting mechanism for the amount of current the host can supply while meeting the minimum voltage. This test uses a variable resistance to slowly increase the current consumption of the test fixture from 8 mA. After each increase in current draw the voltage supplied on VBUS is measured and must be above 4.4 volts. The point at which the voltage drops below 4.4 volts is measured and recorded. If the current draw when VBUS drops below

4.4 volts is below the manufacturer's reported current support the test fails. This test/procedure is intended to provide a consistent means for reporting power provisions for non-standard power providers. The OET provides a variable load resistance for this testing.

9.2.6.2 HS Electrical Host Testing

All USB-IF HS electrical host tests must be performed by OTG devices that are capable of supporting HS devices when acting as hosts. An HS Capable OTG device must either be able to run the existing USB-IF High Speed Electrical Test Tool (Win2k and WinXP support) or provide its own application during test that provides equivalent functionality. The most likely case will be that the OTG device needs to provide its own software application. This section gives an overview of the requirements for the software application that must be provided for electrical testing of OTG devices that are capable of supporting HS devices.

Step 1. Provide means to put all downstream HS capable ports into any of the USB 2.0 test modes. The test modes are described in Section 7.1.20 of the USB 2.0 specification. The test modes must meet the USB 2.0 specification requirements. The test modes are:

- TEST_J:
- TEST_K:
- TEST_SEO_NAK:
- TEST_PACKET:
- TEST_FORCE_ENABLE:

Step 2. Provide the ability to perform any of the following operations on an indicated downstream port.

- HS_HOST_PORT_SUSPEND
- HS_HOST_PORT_RESUME
- HS_HOST_PORT_RESET

Step 3. Provide an option to enumerate everything downstream of the host.

Step 4. Provide the means to select a downstream device and issue any of the following commands to the device:

- GET_DEVICE_DESCRIPTOR - Get the device descriptor for the indicated device and display it.
- SET_ADDRESS - Set the indicated downstream device to the address indicated.
- ENABLE_WAKEUP. Enable remote wakeup on the indicated device.
- DISABLE_WAKEUP. Disable remote wakeup on the indicated device.
- HS_HOST_DS_SINGLE_STEP_SET. Performs the setup phase only of a SET_FEATURE command to the device indicated. The actual set feature command is standard with the following values:
 - bmRequestType = HOST_TO_DEVICE;
 - bRequest = USB_REQUEST_SET_FEATURE;
 - wValue.HiByte = 50
 - wValue.LowByte = 0
 - wIndex = 0;
 - wLength = 0;
- HS_HOST_DS_SINGLE_STEP_SET_STATUS_STAGE. Performs standard status stage for a set feature command.

Example Software: **A sample screenshot of a piece of software providing the functionality described in this section is shown in the figure below.**

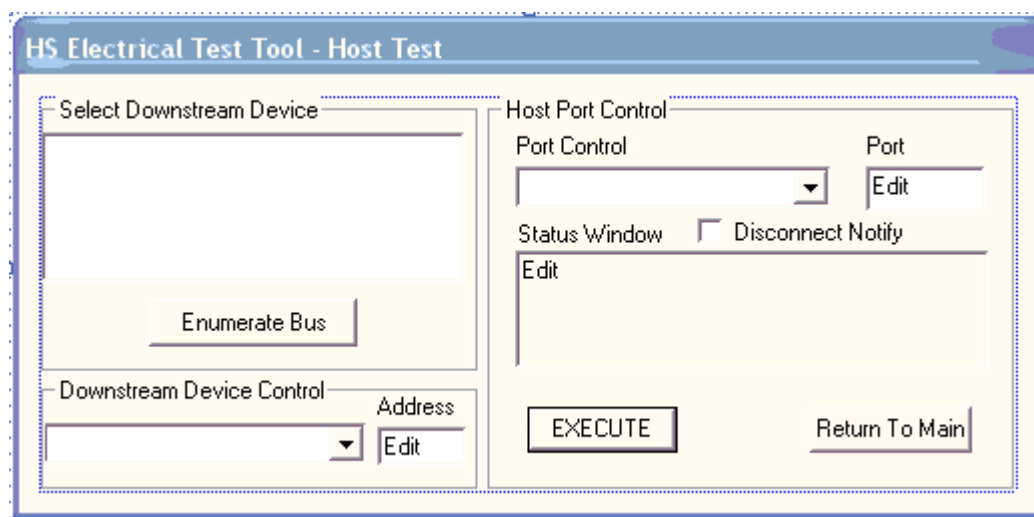


Figure 9-1 HS Electrical Test Tool

This software is provided by the USB-IF as part of the High Speed Electrical Test Package (HSET) distributed on the following USB-IF website:

<http://www.usb.org/developers/tools.html>.

HSET can be downloaded and run on an EHCI (HS capable) host controller as an example of the functionality that needs to be supplied by an application on the OTG device being tested as an HS capable host.